



The

Steady-Grip™

for Precision Amperage Control

With a removable or adjustable "pistol grip" style handle, the new SGACV Steady-Grip™ gives the operator smooth, accurate, and ergonomic "trigger finger" control of the TIG Welding process. The Steady Grip™ can be used with most Constant Current GTAW power sources and provides machine contactor on-off, gas solenoid activation and full range amperage control.

- Complete ON/OFF and full Amperage Control
- Available for most power sources
- Protected against high frequency

Velcro® fastener will fit any torch

Flex-Loc™ Torch (not included)

Adjustable Grip
(3 positions)


Smooth "Trigger finger" for
"Steady" amperage control

Ergonomic Grip

(Patent Pending)

Remove Handle for use as Linear Slide configuration



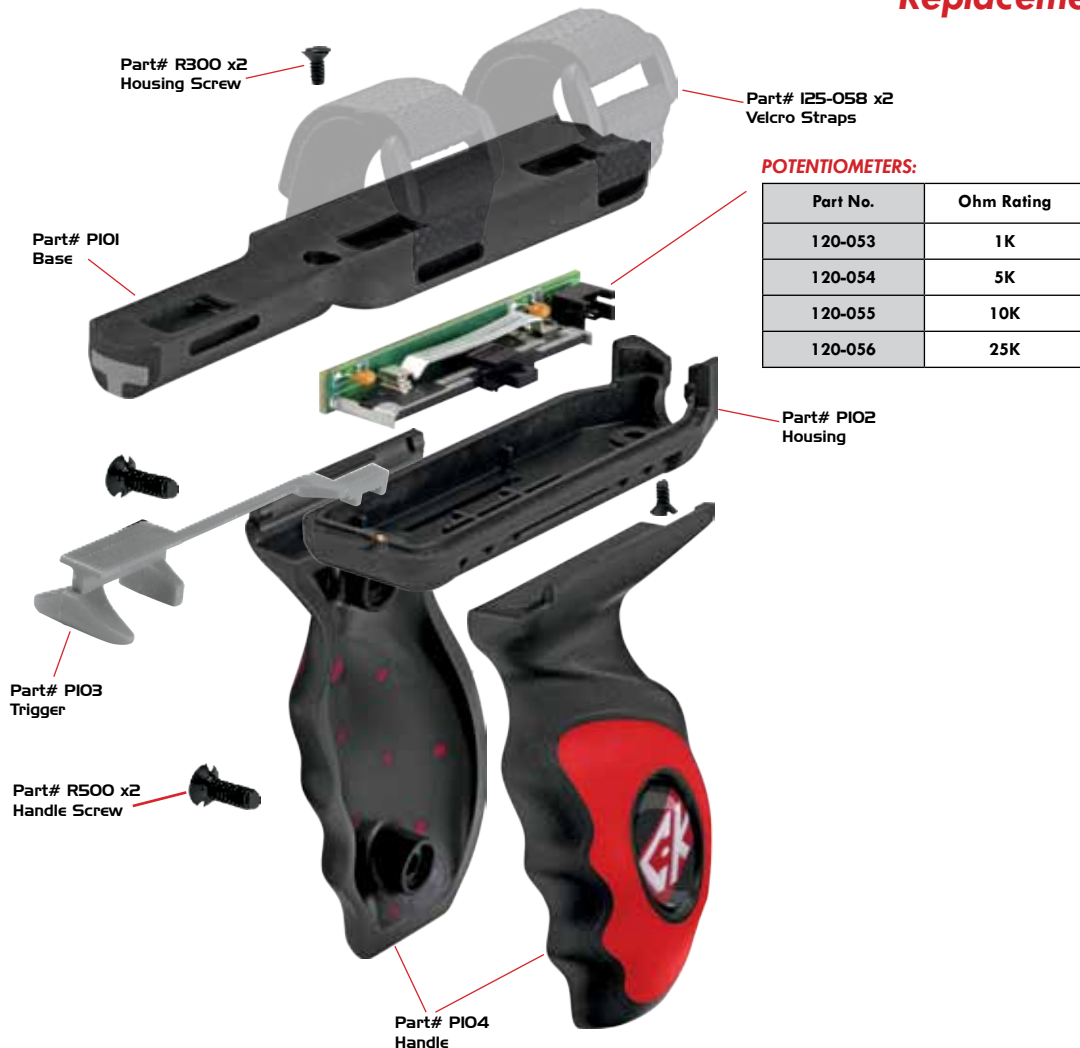

MACHINE MAKE POTENTIOMETER RATING	CONTROL TYPE	PLUG CONFIG AND PIN COUNT	CONTROL CABLE LENGTH	VELCRO® STRAPS
				ONE SIZE FITS ALL
LINCOLN ELECTRIC 10k Ohm	STEADY- GRIP	5 PIN PLUG	15 ft. (4.6m)	SGACV-10-1-L5
			28 ft. (8.5m)	SGACV-10-2-L5
			53 ft. (16.2m)	SGACV-10-3-L5
		6 PIN PLUG	15 ft. (4.6m)	SGACV-10-1-L6
			28 ft. (8.5m)	SGACV-10-2-L6
			53 ft. (16.2m)	SGACV-10-3-L6
MILLER ELECTRIC 1K Ohm	STEADY-GRIP	14 PIN PLUG	15 ft. (4.6m)	SGACV-1-1-M14
			28 ft. (8.5m)	SGACV-1-2-M14
			53 ft. (16.2m)	SGACV-1-3-M14
		5 PIN PLUG	15 ft. (4.6m)	SGACV-1-1-M5
			28 ft. (8.5m)	SGACV-1-2-M5
			53 ft. (16.2m)	SGACV-1-3-M5
TWECO 5K Ohm	STEADY-GRIP	14 PIN PLUG	15 ft. (4.6m)	SGACV-5-1-TD14
			28 ft. (8.5m)	SGACV-5-2-TD14
			53 ft. (16.2m)	SGACV-5-3-TD14
		8 PIN PLUG	15 ft. (4.6m)	SGACV-5-1-TD8
			28 ft. (8.5m)	SGACV-5-2-TD8
			53 ft. (16.2m)	SGACV-5-3-TD8

