


WARRANTY: CK Worldwide, Inc. warrants products manufactured by CK Worldwide, Inc. to be free of defects in materials and workmanship. CK Worldwide, Inc. limits this warranty to replacement of the product or parts thereof and excludes liability for injury, property damage or economic loss attributable to product use or misuse. In any event, CK Worldwide, Inc. will only be responsible for its products when used with accessory items manufactured by CK Worldwide, Inc.

INSTALLATION: Before using this torch, - tighten regulator, hose and power cable fittings with proper wrenches. Using small pliers, securely tighten all knurled hose fittings (Slide the torch handle back for access to the torch connections). Purge the regulator and TIG torch with inert gas at 20 cubic feet per hour. Following these steps will ensure contamination free welds. Repeat this procedure whenever torch or regulator fittings have been detached.

CONNECTION DIAGRAM:

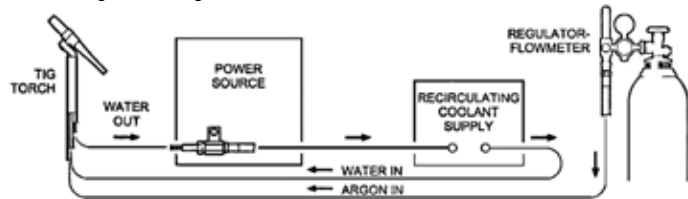


INFORMATION CHART:


Electrode Diameter in inches (mm)	Cup Size	WELDING CURRENT (AMPS) - TUNGSTEN TYPE				ARGON FLOW - FERROUS METALS		ARGON FLOW - ALUMINUM	
		AC Pure	AC Thoriated	DCSP Pure	DCSP Thoriated	Standard Body (Liters)	Gas Lens Body (Liters)	Standard Body (Liters)	Gas Lens Body (Liters)
.020 (0.50)	4 or 5	5 - 15	5 - 20	5 - 15	5 - 20	5-8 (3-4)	5-8 (3-4)	5-8 (3-4)	5-8 (3-4)
.040 (1.00)	4 or 5	10 - 60	15-80	15 - 70	20 - 80	5-10 (3-5)	5-8 (3-4)	5-12 (3-6)	5-10 (3-5)
1/16 (1.60)	4, 5 or 6	50 - 100	70 - 150	70 - 130	80 - 150	7-12 (4-6)	5-10 (3-5)	8-15 (4-7)	7-12 (4-6)
3/32 (2.40)	6, 7 or 8	100 - 160	140 - 235	150 - 220	150 - 250	10-15 (5-7)	8-10 (4-5)	10-20 (5-10)	10-15 (5-7)
1/8 (3.20)	7, 8 or 10	150 - 210	220 - 325	220 - 330	240 - 350	10-18 (5-9)	8-12 (4-6)	12-25 (6-12)	10-20 (5-10)
5/32 (4.00)	8 or 10	200 - 275	300 - 425	375 - 475	400 - 500	15-25 (7-12)	10-15 (5-7)	15-30 (7-14)	12-25 (6-12)
3/16 (4.80)	8 or 10	250 - 350	400 - 525	475-800	475-800	20-35 (10-17)	12-25 (6-12)	25-40 (12-19)	15-30 (7-14)
1/4 (6.40)	10	325 - 700	500 - 700	750 - 1000	700 - 1100	25-50 (12-24)	20-35 (10-17)	30-55 (14-26)	25-45 (12-21)

TUNGSTEN PREPARATION:

END PREPARATION: DCSP (EN)
General Purpose:




ACHF
General Purpose:




Ball tip by arcing on clean metal at low current DCRP (EP) then slowly increase current to form the desired ball diameter.


GRINDING PREPARATION:
Use a 60 Grit or finer aluminum oxide wheel

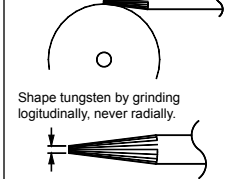


Remove sharp point to leave a truncated point with a flat spot. Diameter of flat spot determines amperage.

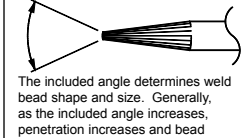

EXTENSION INSTRUCTION: STANDARD PARTS
General Purpose:



GAS LENS PARTS
General Purpose:



CAUTION: Personal harm will result from touching the hot parts of a TIG torch without insulative protection, or from looking directly or indirectly at an arc or reflected arc. At no time should bare skin be exposed to a welding arc.



TIG TORCH MANUAL



TL18 & TL18V FLEX

TECHNICAL INFORMATION

RATING @ 100% DUTY CYCLE: 350 AMP ACHF OR DCSP
COOLING METHOD: WATER COOLED






ACCESSORY ITEMS REQUIRED FOR COMPLETE INSTALLATION:

HEAD ACCESSORIES: 3 SERIES HEAD ACCESSORIES
POWER CABLE ADAPTOR: 45V11 (2PCA)

MODEL SELECTOR - TORCH PACKAGES

HEAD STYLE	CABLE STYLE	CABLE LENGTH	STANDARD CABLE	SUPERFLEX CABLE
Rigid Head -w/o VALVE	3 Piece Cable	12-1/2 ft. (3.8m)	TL18-12 FX	TL18-12SF FX
		25 ft (7.6m)	TL18-25 FX	TL18-25SF FX
Rigid Head -w/ VALVE	3 Piece Cable	12-1/2 ft. (3.8m)	TL18-12V FX	TL18-12VSF FX
		25 ft (7.6m)	TL18-25V FX	TL18-25VSF FX

IMPORTANT !!
READ AND UNDERSTAND THE INFORMATION CONTAINED IN THIS MANUAL BEFORE OPERATING THE EQUIPMENT !

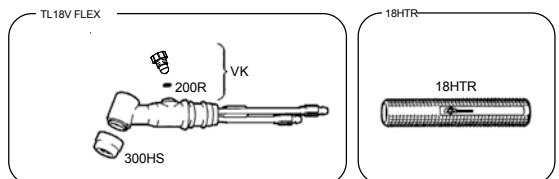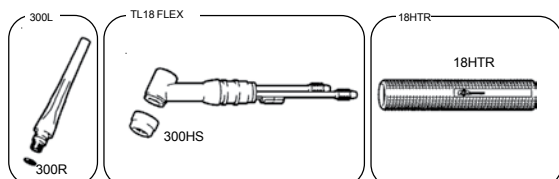


PART #	DESCRIPTION
--------	-------------

TORCH
 TL18 FLEX..... TORCH BODY ASSEMBLY
 TL18V FLEX..... TORCH BODY VALVED
 18HTR..... HANDLE

INDIVIDUAL CABLE HOSES
 VK..... GAS VALVE
 45V09..... GAS HOSE-12-1/2 FT. (INCLUDES FITTINGS)
 45V08SF..... GAS HOSE-12-1/2 FT. (INCLUDES FITTINGS)
 2312PC..... POWER CABLE-12-1/2 FT. (INCLUDES FITTINGS)
 2312PCSF..... POWER CABLE-12-1/2 FT. (INCLUDES FITTINGS)
 2325PC..... POWER CABLE- 25 FT. (INCLUDES FITTINGS)
 2325PCSF..... POWER CABLE- 25 FT. (INCLUDES FITTINGS)
 45V07..... WATER HOSE-12-1/2 FT. (INCLUDES FITTINGS)
 45V07SF..... WATER HOSE-12-1/2 FT. (INCLUDES FITTINGS)
 45V10..... GAS HOSE-25 FT. (INCLUDES FITTINGS)
 45V10SF..... GAS HOSE-25 FT. (INCLUDES FITTINGS)
 45V08..... WATER HOSE-25 FT. (INCLUDES FITTINGS)
 45V08SF..... WATER HOSE-25 FT. (INCLUDES FITTINGS)


ACCESSORIES
 2PCA (45V11)..... POWER CABLE ADAPTER
 SLWHAT-T..... TWECO POWER CABLE ADAPTER
 SLWHAT-25..... DINSE 25 POWER CABLE ADAPTER
 SLWHAT-35..... DINSE 35 POWER CABLE ADAPTER
 SLWHAT-35M..... DINSE 35 GAS FLOW-THRU POWER CABLE ADAPTER
 300R..... O-RING
 300HS..... HEATSHIELD
 300L..... BACKCAP
 2AN..... GAS NUT
 2WN..... WATER NUT
 3HF..... HOSE FITTING
 23PF1..... POWER CABLE FITTING
 23PF2..... POWER CABLE FITTING

3 SERIES HEAD ACCESSORIES GAS SAVER

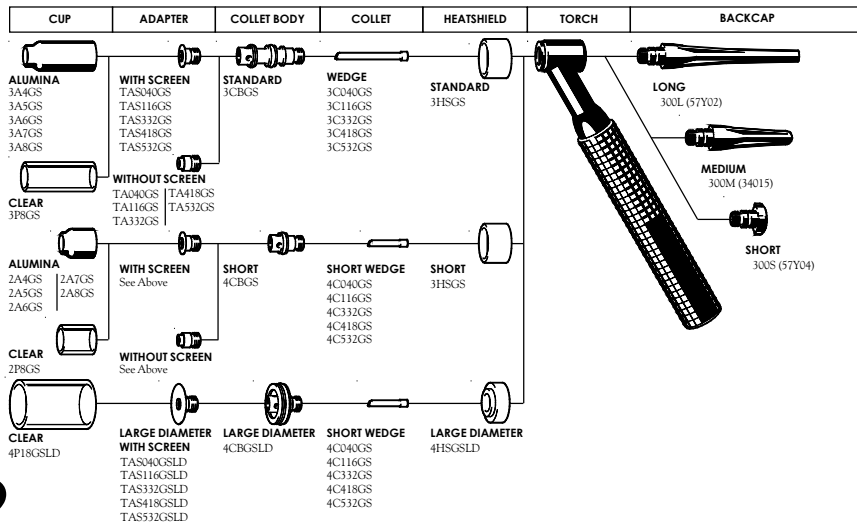

2

3 SERIES HEAD ACCESSORIES

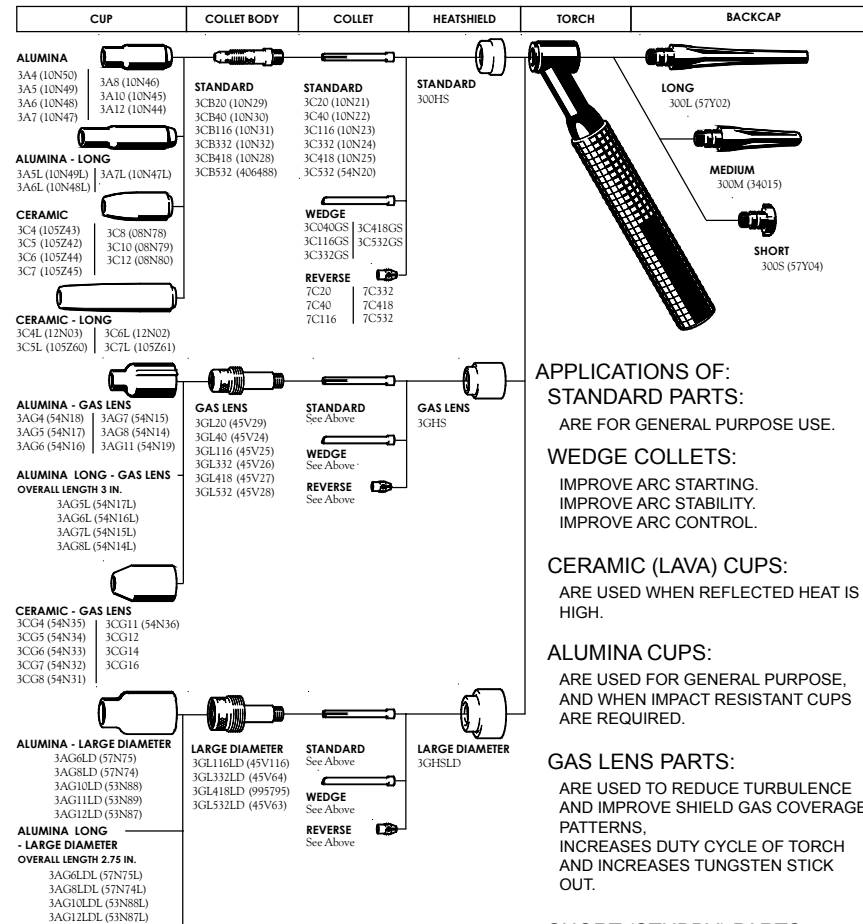

ALUMINA
 3A4 (10N50)
 3A5 (10N49)
 3A6 (10N48)
 3A7 (10N47)

ALUMINA - LONG
 3A5L (10N49L)
 3A6L (10N48L)

CERAMIC
 3C4 (10S243)
 3C5 (10S242)
 3C6 (10S244)
 3C7 (10S245)

CERAMIC - LONG
 3C4L (12N03)
 3C5L (10S260)

ALUMINA - GAS LENS
 3AG4 (54N18)
 3AG5 (54N17)
 3AG6 (54N16)

ALUMINA LONG - GAS LENS
 OVERALL LENGTH 3 IN.
 3AG5L (54N17L)
 3AG6L (54N16L)
 3AG7L (54N15L)
 3AG8L (54N14L)

CERAMIC - GAS LENS
 3CG4 (54N35)
 3CG5 (54N34)
 3CG6 (54N33)
 3CG7 (54N32)
 3CG8 (54N31)

ALUMINA - LARGE DIAMETER
 3AG6LD (57N75)
 3AG8LD (57N74)
 3AG10LD (53N88)
 3AG11LD (53N89)
 3AG12LD (53N87)

ALUMINA LONG - LARGE DIAMETER
 OVERALL LENGTH 2.75 IN.
 3AG6LDL (57N75L)
 3AG8LDL (57N74L)
 3AG10LDL (53N88L)
 3AG12LDL (53N87L)

ALUMINA EXTRA LONG - LARGE DIAMETER
 OVERALL LENGTH 3.25 IN.
 3AG6LDXL (57N75XL)
 3AG8LD XL (57N74XL)
 3AG10LDXL (53N88XL)
 3AG12LDXL (53N87XL)

TUNGSTEN ELECTRODE CONVERSION CHART

Size Suffix	Inches	Millimeters
020	.020"	.5mm
040	.040"	1.0mm
116	1/16"	1.6mm
332	3/32"	2.4mm
418	1/8"	3.2mm
532	5/32"	4.0mm

APPLICATIONS OF:
STANDARD PARTS:
 ARE FOR GENERAL PURPOSE USE.

WEDGE COLLETS:
 IMPROVE ARC STARTING.
 IMPROVE ARC STABILITY.
 IMPROVE ARC CONTROL.

CERAMIC (LAVA) CUPS:
 ARE USED WHEN REFLECTED HEAT IS HIGH.

ALUMINA CUPS:
 ARE USED FOR GENERAL PURPOSE,
 AND WHEN IMPACT RESISTANT CUPS
 ARE REQUIRED.

GAS LENS PARTS:
 ARE USED TO REDUCE TURBULENCE
 AND IMPROVE SHIELD GAS COVERAGE
 PATTERNS,
 INCREASES DUTY CYCLE OF TORCH
 AND INCREASES TUNGSTEN STICK
 OUT.

SHORT (STUBBY) PARTS:
 ARE USED TO SHORTEN THE OVERALL
 LENGTH OF THE TORCH HEAD.
 REDUCES DUTY CYCLE OF TORCH

GAS SAVER® PARTS:
 ARE USED TO SAVE UP TO 40% ON GAS
 CONSUMPTION.
 ARE USED TO SAVE UP TO 60% ON
 CONSUMABLE PARTS.
 ARE USED TO CLEARLY SEE THE WELD
 PUDDLE.
 ARE USED TO ACHIEVE GAS LENS

3