




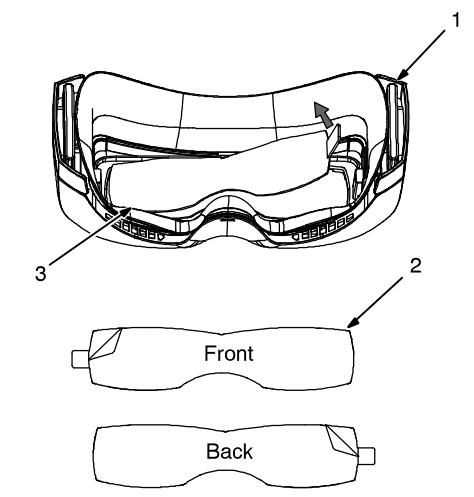


4-2. Changing Inner Anti-Fog Lens



☞ Remove protective film from both sides of new lens.

- 1 Goggle
- 2 Inner Anti-Fog Lens
- 3 Bottom Slots






Use tab to pull existing anti-fog lens away from the frame. Remove protective film from inside of new lens. Align lens with the left side of the frame and slowly press down on the lens to remove bubbles.


When lens is secured, remove the protective film from outside of new lens.

☞ Use your finger to remove bubbles from the lens. Start at the center of the lens and work toward the edges in short, even strokes.

☞ Be sure the anti-fog lens is seated properly (flat) to prevent fogging.

4-3. Inserting Magnifying Lens Frame

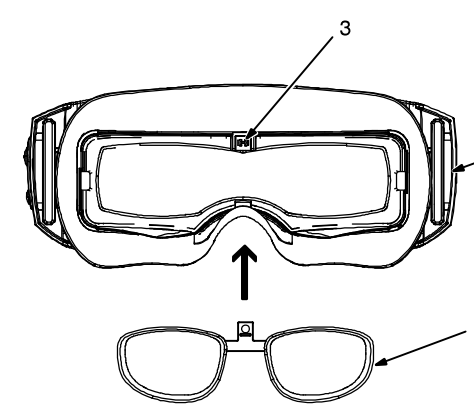

- 1 Goggle
- 2 Magnifying Lens Frame
- 3 Magnifying Lens Slot

Install lens frame tab in slot on top section of silicone eye skirt.